

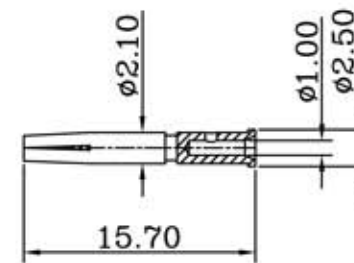


REVISIONS				
RevNo	Description	Date	Revision	Mender
1				
2				

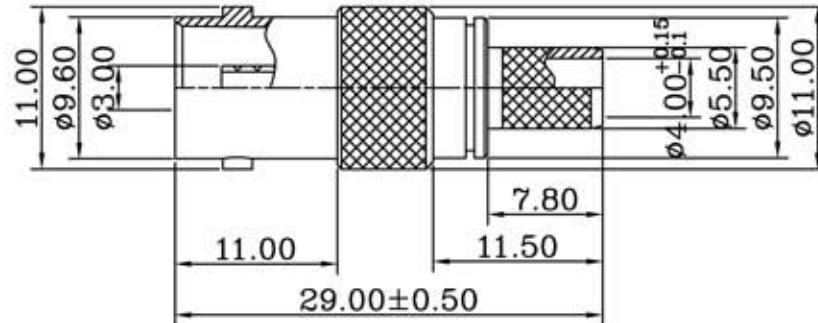

ROHS Compliant

1. CRIMPED FERRULE HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" OR TO SOLDER

ELECTRICAL

IMPEDANCE: 75 OHM

FREQUENCY RANGE: 0 ~ 5 GHz

WORKING VOLTAGE: 500 Vrms Max.

DIELECTRIC WITHSTANDING VOLTAGE: 1500 Vrms Min.

RETURN LOSS: -15dB Min. @ 0-5 GHz

REFLECTION FACTOR (VSWR): 1.4(Max) DC-5 GHz

CONTACT RESISTANCE:


CENTRE CONTACT 1.5 MILLI OHMS MAX.

OUTER CONTACT 1.0 MILLI OHMS MAX.

INSULATION RESISTANCE: > 5000 MEG OHM Min.

ENVIRONMENTAL

TEMPERATURE RANGE: -65°C TO 165°C



RECOMMENDED
CABLE STRIPPING DIM'S

6	FERRULE	BRASS	1	NICKEL PLATED
5	CONTACT PIN	BRASS	1	GLOD PLATED
4	WASHER	IRON	1	NICKEL PLATED
3	INSULATOR	TEFLON	1	WHITE
2	INSULATOR	TEFLON	1	WHITE
1	BODY	ZINC	1	NICKEL PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

				TITLE	
				BNC FEMALE CRIMP FOR RG59U, 75 OHM	
DRAWING NO.		UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00	DESIGNED
		SCALE	FIT		DRAWING
MODEL NO.	APBC05-5G			PUBLISH DATE	CHECKED
PART NO.		EDITION	A1		APPROVED
CAD FILE				3RD ANGLE	